

EXP Cable Gland

Short-Type




Product Description


- Certificated Protection: Ex d II U
- Material: Stainless steel
- Operation temperature: -20°C ~ + 40 °C
- Thread Standards:
ISO – I EC / EN 60423, IEC/EN 50262
PF – JIS B 0202
NPT – ANSI B2.1

Without Connector

▼ Without Socket Set Screw




▼ With Socket Set Screw

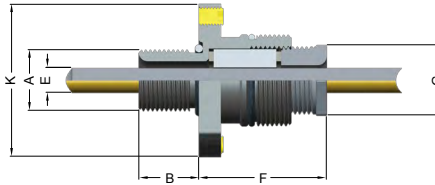


Part Number	Entry Thread Size "A"	Thread Length "B"	Cable Acceptance "E"		Gland Length "F" (less entry)	Across Flats "G"	Hexagon Dimensions "K"
			Max.	Min.			
Without Socket Set Screw							
THT-2GM020UX12438A	M20	19.7mm	8.0mm	7.0mm	41.9mm	23mm	32mm
THT-2GM020UX12431A	M20	19.7mm	8.5mm	7.5mm	41.9mm	23mm	32mm
THT-2GG012UX12438A	G1/2"	19.7mm	8.0mm	7.0mm	41.9mm	23mm	32mm
THT-2GG012UX12431A	G1/2"	19.7mm	8.5mm	7.5mm	41.9mm	23mm	32mm
THT-2GN034UX12438A	NPT3/4"	18.0mm	8.0mm	7.0mm	41.8mm	28mm	38mm
THT-2GN034UX12431A	NPT3/4"	18.0mm	8.5mm	7.5mm	41.8mm	28mm	38mm
With Socket Set Screw							
THT-2GM020UX13288A	M20	19.7mm	8.0mm	7.0mm	41.9mm	23mm	50mm
THT-2GM020UX13281A	M20	19.7mm	8.5mm	7.5mm	41.9mm	23mm	50mm
THT-2GG012UX13288A	G1/2"	19.7mm	8.0mm	7.0mm	41.9mm	23mm	50mm
THT-2GG012UX13281A	G1/2"	19.7mm	8.5mm	7.5mm	41.9mm	23mm	50mm
THT-2GN034UX13288A	NPT3/4"	18.0mm	8.0mm	7.0mm	41.8mm	28mm	50mm
THT-2GN034UX13281A	NPT3/4"	18.0mm	8.5mm	7.5mm	41.8mm	28mm	50mm

With Connector

▼ Without Socket Set Screw

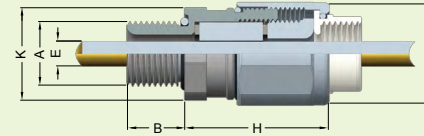

▼ With Socket Set Screw

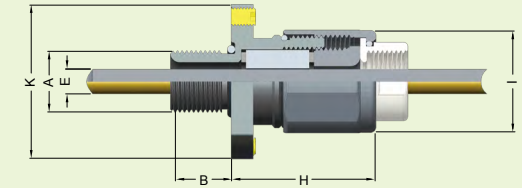

Part Number	Entry Thread Size "A"	Thread Length "B"	Cable Acceptance "E"		Gland Length "H" (less entry)	Across Flats "I"	Hexagon Dimensions "K"
			Max.	Min.			
Without Socket Set Screw							
THT-2GM020UX124380	M20	19.7mm	8.0mm	7.0mm	57.4mm	33.3mm	32mm
THT-2GM020UX124310	M20	19.7mm	8.5mm	7.5mm	57.4mm	33.3mm	32mm
THT-2GG012UX124380	G1/2"	19.7mm	8.0mm	7.0mm	57.4mm	33.3mm	32mm
THT-2GG012UX124310	G1/2"	19.7mm	8.5mm	7.5mm	57.4mm	33.3mm	32mm
THT-2GN034UX124380	NPT3/4"	18.0mm	8.0mm	7.0mm	56.8mm	41mm	38mm
THT-2GN034UX124310	NPT3/4"	18.0mm	8.5mm	7.5mm	56.8mm	41mm	38mm
With Socket Set Screw							
THT-2GM020UX132880	M20	19.7mm	8.0mm	7.0mm	57.4mm	33.3mm	50mm
THT-2GM020UX132810	M20	19.7mm	8.5mm	7.5mm	57.4mm	33.3mm	50mm
THT-2GG012UX132880	G1/2"	19.7mm	8.0mm	7.0mm	57.4mm	33.3mm	50mm
THT-2GG012UX132810	G1/2"	19.7mm	8.5mm	7.5mm	57.4mm	33.3mm	50mm
THT-2GN034UX132880	NPT3/4"	18.0mm	8.0mm	7.0mm	56.8mm	41mm	50mm
THT-2GN034UX132810	NPT3/4"	18.0mm	8.5mm	7.5mm	56.8mm	41mm	50mm